




NTN Bearing Rolamentos do Brasil Ltda.

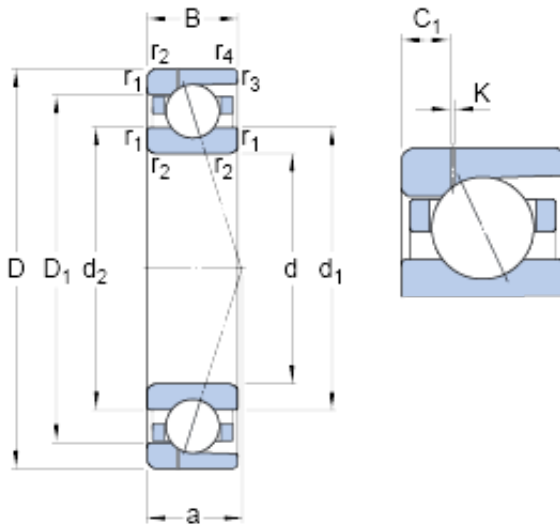

160 mm x 240 mm x 38 mm skf 7032
 CD/P4AH1 Super-precision Angular contact ball
 bearings

Bearing No. 7032 CD/P4AH1

7032 CD/P4AH1 Bearing 2D drawings and 3D CAD
 models

Size	240x160x38 mm
Bore Diameter	240 mm
Outer Diameter	160 mm
Width	38 mm
d	160 mm
D	240 mm
B	38 mm
d ₁	184.7 mm
d ₂	184.7 mm
D ₁	215.3 mm
K	0.6 mm
C ₁	10.3 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	1 mm
a	45.9 mm
d _a - min.	171 mm
d _b - min.	171 mm
D _a - max.	229 mm
D _b - max.	235 mm
r _a - max.	2 mm
r _b - max.	1 mm
d _n	191.4 mm
Basic dynamic load rating - C	195 kN



NTN Bearing Rolamentos do Brasil Ltda.

Basic static load rating - C_0	216 kN
Fatigue load limit - P_u	6.6 kN
Limiting speed for grease lubrication	5600 r/min
Limiting speed for oil lubrication	8500 mm/min
Ball - D_w	25.4 mm
Ball - z	22
G_{ref}	66 cm ³
Calculation factor - f_0	15.8
Preload class A - G_A	730 N
Preload class B - G_B	1460 N
Preload class C - G_C	2920 N
Preload class D - G_D	5840 N
Calculation factor - f	1.16
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.09
Calculation factor - f_{HC}	1
Preload class A	171 N/micron
Preload class B	233 N/micron
Preload class C	327 N/micron
Preload class D	472 N/micron
d_1	184.7 mm
d_2	184.7 mm
D_1	215.3 mm
C_1	10.3 mm
$r_{1,2}$ min.	2.1 mm



NTN Bearing Rolamentos do Brasil Ltda.

$r_{3,4}$ min.	1 mm
d_a min.	171 mm
d_b min.	171 mm
D_a max.	229 mm
D_b max.	235 mm
r_a max.	2 mm
r_b max.	1 mm
d_n	191.4 mm
Basic dynamic load rating C	195 kN
Basic static load rating C_0	216 kN
Fatigue load limit P_u	6.55 kN
Attainable speed for grease lubrication	5600 r/min
Attainable speed for oil-air lubrication	8500 r/min
Ball diameter D_w	25.4 mm
Number of balls z	22
Reference grease quantity G_{ref}	66 cm ³
Preload class A G_A	730 N
Static axial stiffness, preload class A	171 N/ μ m
Preload class B G_B	1460 N
Static axial stiffness, preload class B	233 N/ μ m
Preload class C G_C	2920 N
Static axial stiffness, preload class C	327 N/ μ m
Preload class D G_D	5840 N
Static axial stiffness, preload class D	472 N/ μ m
Calculation factor f	1.16
Calculation factor f_1	1
Calculation factor f_{2A}	1



NTN Bearing Rolamentos do Brasil Ltda.

Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.09
Calculation factor f_{HC}	1
Calculation factor f_0	15.8
Mass bearing	5.15 kg